

**METHOD OF PREPARING WATER-ABSORBENT RESIN****Patent number:** DE69030971T**Publication date:** 1997-12-11**Inventor:** NAGASUNA KINYA HAMADA SHATAKU (JP);  
KAJIKAWA KATSUHIRO NISSHOKU HA (JP);  
HATSUDA TAKUMI HAMADA SHATAKU (JP); IRIE  
YOSHIO - (JP); FUJIWARA TERUAKI - (JP)**Applicant:** NIPPON CATALYTIC CHEM IND (JP)**Classification:****- international:** C08F6/00**- european:** C08F6/00B**Application number:** DE19906030971T 19900831**Priority number(s):** JP19890227547 19890904; WO1990JP01116 19900831**Also published as:**

EP0441975 (A1)

WO9103497 (A1)

US5229488 (A1)

EP0441975 (A4)


EP0441975 (B1)

**Report a data error here**

Abstract not available for DE69030971T

Abstract of corresponding document: **EP0441975**

A method of preparing a water-absorbent resin excellent in water absorption characteristics and reduced in the content of residual monomers, which comprises adding a reductive substance and an aqueous liquid containing 7 to 100 parts by weight of water to 100 parts by weight of a powdery water-absorbent resin in the presence of 0.01 to 5 parts by weight of at least one member selected from the group consisting of water-insoluble particulate powders and surfactants.

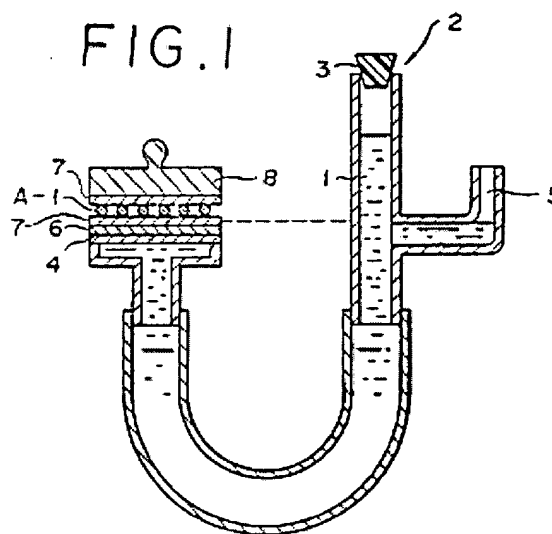

Data supplied from the esp@cenet database - Worldwide